


# NORWECO.

NORWALK WASTEWATER EQUIPMENT COMPANY

## SINGULAIR<sup>®</sup> BIO-KINETIC<sup>®</sup> WASTEWATER TREATMENT SYSTEM

Automatically reduces all domestic wastewater to a clear, odorless liquid in just 24 hours

Enhances property value while protecting the environment

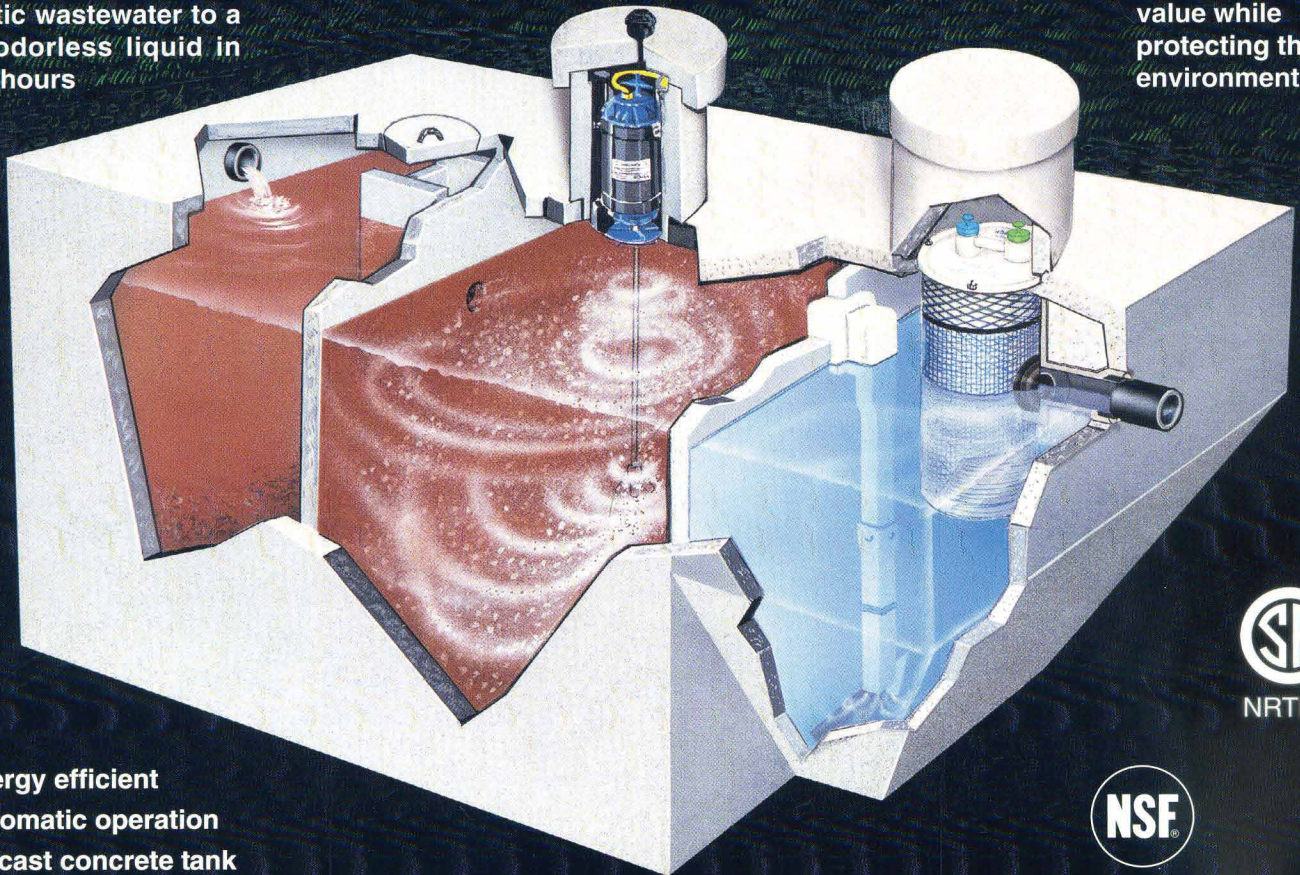

- Energy efficient
- Automatic operation
- Precast concrete tank
- 500 to 1500 gallons per day

SA<sup>®</sup>  
NRTL/C

NSF<sup>®</sup>

Certified to NSF/ANSI Standard 40  
Class 1

# BIO-KINETIC®

## A UNIQUE NEW DESIGN THAT EXCEEDS GOVERNING CRITERIA AND ASSURES YEARS OF RELIABLE TREATMENT AND TROUBLE-FREE OPERATION...

- 50% less energy required—the Singulair aerator operates only 30 minutes per hour, providing substantial savings over continuous-run systems.
- NSF and CSA listed to internationally recognized performance standards—certified testing insures quality, reliability, safety and long life.
- Frequent tank pumping eliminated—48 hour retention in the Singulair system reduces pumping frequency compared to smaller capacity systems.
- Low operating cost—the Singulair aerator is the only electrical component. The fractional horsepower aerator motor requires less electrical energy than most major appliances.
- Low installation cost—the Singulair plant may be installed to treat all domestic wastewater at a cost comparable to that of a septic system.
- Increases property value—insures a safe, sanitary home environment. Eliminates the unsightly and unsanitary conditions associated with troublesome septic tanks.
- Durable, reliable components installed safely below grade—no exposed power cords, compressors, filters or air lines accessible to children or pets.
- Precast concrete pretreatment chamber included—eliminates the need to purchase a separate tank.
- State-of-the-art design—the Bio-Kinetic system equalizes flow through all treatment stages, is an NSF/ANSI Standard 46 certified chlorination device and serves as its own contact chamber.
- Fully warranted components—backed by the longest warranty and exchange program in the industry.
- Equalizes hydraulic surges—at the Standard 40 500 GPD design loading pattern, all flow is equalized an average of 48%.
- Consistent treatment—variations in flow from guests, parties or vacations do not affect performance.
- Local distribution and service—all Singulair systems are installed and serviced by licensed, factory-trained Norweco distributors. Their company name and address are displayed on the control center cover.

